




PANEL5000-C1043-LH

V1.0

Touch Screen Monitor



10.4" TFT Capacitive Touch Screen Monitor




Specifications:

General	Control button	Set Contrast ratio and Luminance via OSD at the back panel
	Dimensions (W x H x D)	298.5mm x238.5mm x 47mm
	Cut out Size (W x H)	280.5mm x220.5mm
	Box structure	Front panel frame: aluminum-magnesium alloy; Back cover: SGCC, silver
	Mounting	Support panel mounted, wall-mounted, Desktop (VESA 75x75 & 100x100)
	Power Supply	DC 12-24V
	Power consumption	10W
	Signal input	VGA & HDMI
	Weight	3.5kg
LCD	LCD Size	10.4TFT
	Resolution	1024*768
	Colors	16.7MB
	Active Area (W x H)	211.2mm × 158.4 mm
	Backlight	LED
	MTBF	30000hrs
	Pixel Pitch(H x V)	0.206 x 0.206
	Luminance	350cd/m2
	Contrast Ratio	900:1
	Viewing Angle	(L)75 / (R) 75 / (T) 75/ (B) 75
Touchscreen	Type	Multi-point capacitive touch screen
	Transmittance	> 87%
	Controller interface	USB
	Driver Support	Windows 7, Winows8, Windows 10, Linux
	Multi-touch	10 points (windows system)
	Surface Hardness	Mohs' 7H
Environmental	Operating Temperature	-20 ~ 60° C (full HD 0~50° C)
	Storage Temperature	-30 ~ 80°C
	Relative humidity	5~95% RH@40°C,non-condensing
	Vibration	Operating Random Vibration Test 5~500Hz, 1.5Grms@with SSD, follow IEC 60068-2-64
	Shock	Operating 10G peak acceleration (11ms duration), follow IEC 60068-2-27
	EMC	CE/FCC Class B
	Front panel protection	IP65 compliant

Dimensions:

Unit : mm

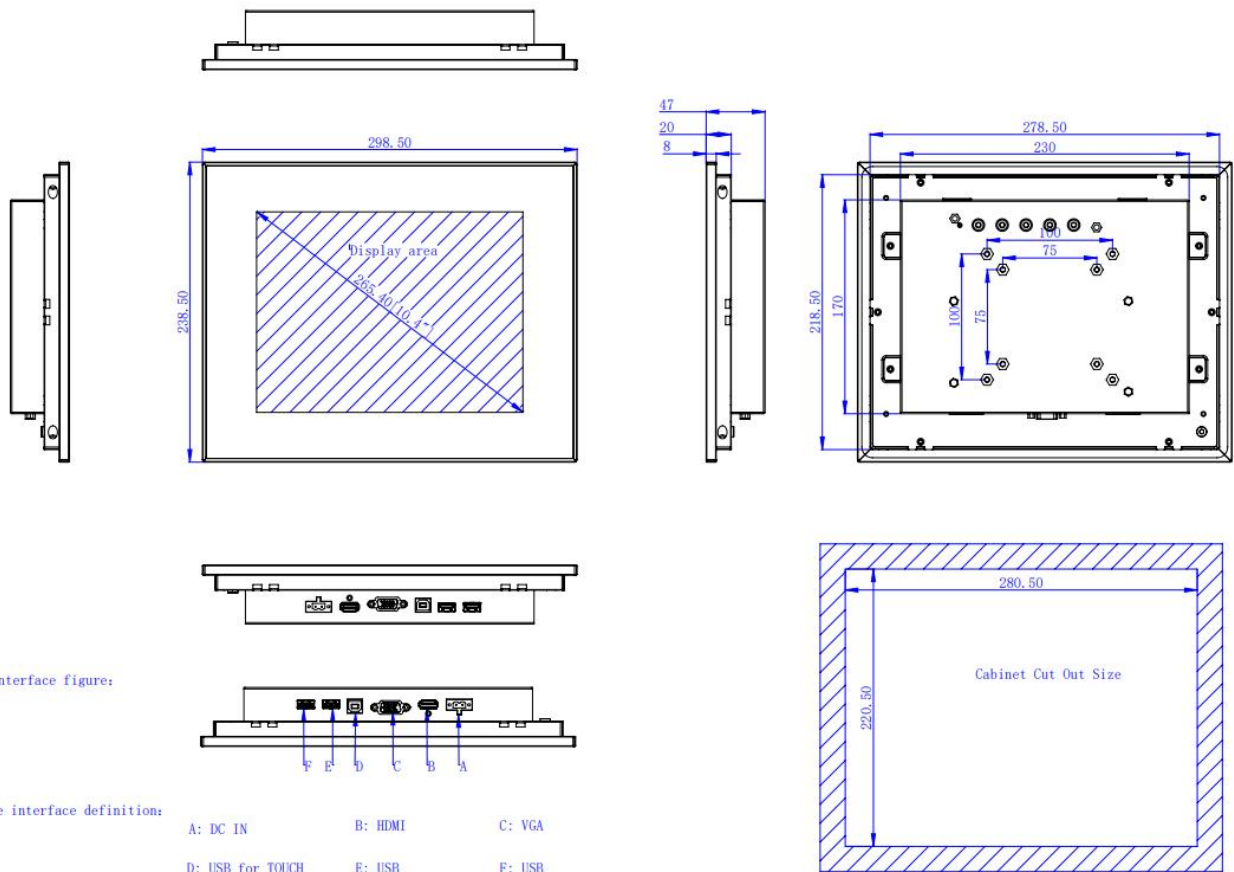

Interface figure:

The interface definition:

- A: DC IN
- B: HDMI
- C: VGA
- D: USB for TOUCH
- E: USB
- F: USB

Ordering Information:

Model Name	Description
PANEL5000-C1043-LH	10.4" TFT LCD / 1024*768 / 1xVGA / 1xHDMI / 2x USB / Capacitive Touch Screen/DC12-24V

Packing List:

Mounting screws	4pcs, Thickness=1mm~1.2mm
Terminal	2pin Phoenix terminal
VGA/HDMI Cable	1.8M
USB Cable	1.8M

Optional Items:

Adapter	12V/3.33A,40W 2pin Phoenix terminal
Power Cord	1.8M/3M/5M
VGA Cable	3M/5M
USB Cable	3M/5M
DVI Cable	1.8M/3M/5M